





B+W ID **47889**
 Hybrid Holder 652a
 Hekla

rated current 5A
 rated voltage 250V
 rated temp. T120

B+W interface Hekla

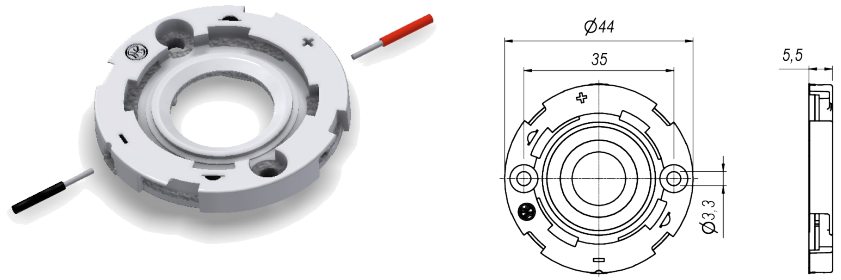

VDE certificate	40050075		fixing	2 screws M3	Flyer	B+W_630_OnePager_EN
UL certificate	E472943Sec2		max. torque	0,5 Nm	Tec. Guide	B+W_630_Technical Guide
CE certificate	630CE					
material						
housing	PBT / Mica					
contact	CuSn					

COB served by Holder		Optic served by Holder	
Lumileds	L2C5-xxxx1202EH600 Luxeon Core Range HD Gen1	Gaggione adapter:	HADAR50 (-ZOOM) H90* (Hekla)
Lumileds	L2C5-xxxx1202FH600 Luxeon Core Range HD Gen2	Gaggione adapter:	HADAR70 (-ZOOM) H90* (Hekla)
Lumileds	L2C5-xxxx1202x060x Luxeon Core Range Gen5 / Gen6	Ledil adapter:	ADELIA-110 C18323_ADELIA-110-ADAPTER-C
Luxtech	COB-WD-10-xxx-xxx-xx DTW	Ledil adapter:	ADELIA-50 C18432_ADELIA-ADAPTER-C
Nichia	NFCWS024B-Vx	Ledil adapter:	ADELIA-70 C18432_ADELIA-ADAPTER-C
Nichia	NFCWT012B-V4H6	Ledil adapter:	ADELIA-75 C18432_ADELIA-ADAPTER-C
Nichia	NJCWS024Z-Vx	Ledil adapter:	ADELY-50 (HLD2-C ; Hekla) C18691_YASMEEN-50-HLD2-C
Nichia	NTCWS024B-Vx	Ledil adapter:	ADELY-70 (HLD2-C; Hekla) C19427_YASMEEN-70-HLD2-C
Nichia	NVNWS007Z-Vx	Ledil adapter:	AMY-110-C (Hekla)
Philips/Signify	Fortimo SLM xx xxx 1202 L06 1215 G7 / G7 HE / G8 HE	Ledil adapter:	AMY-50-xx-C2 (Hekla)
		Ledil adapter:	AMY-70-xx-C2 (Hekla)
		Ledil adapter:	BARBARA-xx-G2 (Hekla)
		Ledil adapter:	BROOKE-xx-G2 (Hekla)
		Ledil adapter:	CARMEN-50-xx-C (Hekla)
		Ledil adapter:	CARMEN-xx-C (70) (Hekla)
		Ledil adapter:	ILONA (Hekla)

652a

COB served by Holder	Optic served by Holder
	Ledil adapter: MIRELLA-G2 (Hekla)
	Ledil adapter: RONDA-xx-C (Hekla)
	Ledil adapter: WINNIE-xx-C (Hekla)
	Ledil adapter: YASMEEN-50-xx-C (Hekla)
	Ledil adapter: YASMEEN-70-xx-C (Hekla)
	Ledil adapter: ZORYA-SC-C (Hekla)
	Ledlink adapter: LL01CR-CEN-xxL02 630/50574 Adaptor Ledlink