


B+W ID **47456**  
Hybrid Holder 652a  
3Hook

rated current 5A  
rated voltage 250V  
rated temp. T120

B+W interface 3Hook

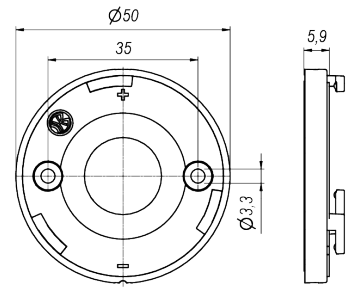

VDE certificate	<a href="#">40050075</a>		fixing	2 screws M3	Flyer	<a href="#">B+W_630_OnePager_EN</a>
UL certificate	<a href="#">E472943Sec2</a>		max. torque	0,5 Nm	Tec. Guide	<a href="#">B+W_630_Technical Guide</a>
CE certificate	<a href="#">630CE</a>					
material						
housing	PBT / Mica					
contact	CuSn					

COB served by Holder		Optic served by Holder	
<b>Lumileds</b>	L2C5-xxxx1202EH600 Luxeon Core Range HD Gen1	<b>Carclo</b> adapter:	S1
<b>Lumileds</b>	L2C5-xxxx1202FH600 Luxeon Core Range HD Gen2	<b>Ledil</b> adapter:	ANGELA (3Hook)
<b>Lumileds</b>	L2C5-xxxx1202x060x Luxeon Core Range Gen5 / Gen6	<b>Ledil</b> adapter:	ANGELETTE (3Hook)
<b>Luxtech</b>	COB-WD-10-xxx-xxx-xx DTW	<b>Ledil</b> adapter:	ANGELINA (3Hook)
<b>Nichia</b>	NFCWS024B-Vx	<b>Ledil</b> adapter:	MOLLY (3Hook)
<b>Nichia</b>	NFCWT012B-V4H6	<b>Ledil</b> adapter:	RONDA (3Hook)
<b>Nichia</b>	NJCWS024Z-Vx		
<b>Nichia</b>	NTCWS024B-Vx		
<b>Nichia</b>	NVNWS007Z-Vx		
<b>Philips/Signify</b>	Fortimo SLM xx xxx 1202 L06 1215 G7 / G7 HE / G8 HE		