





B+W ID **47463**
Hybrid Holder 638a
Bayonet50

rated current 5A
rated voltage 250V
rated temp. T120

B+W interface B50

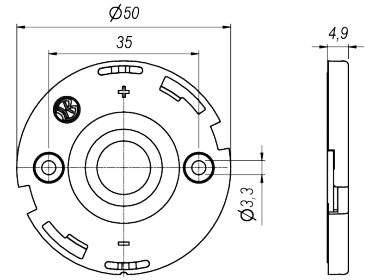

VDE certificate	40050075		fixing	2 screws M3	Flyer	B+W_630_OnePager_EN
UL certificate	E472943Sec2		max. torque	0,5 Nm	Tec. Guide	B+W_630_Technical Guide
CE certificate	630CE					
material						
housing	PBT / Mica					
contact	CuSn					

COB served by Holder		Optic served by Holder	
Nichia	NFCWL036B-Vx	Gaggione adapter:	HADAR70 (-ZOOM) H41* (B50)
Nichia	NFCWL048B-Vx	Gaggione adapter:	LLR027M
Nichia	NFCWL060B-Vx	Gaggione adapter:	LLR07M
Nichia	NVCWL024Z-Vx	Herculux adapter:	Kirin D50
Nichia	NVEWL016Z_Vx	Ledil adapter:	ADELIA-110 C18324_ADELIA-110-ADAPTER-B
		Ledil adapter:	ADELIA-50 C18431_ADELIA-ADAPTER-B
		Ledil adapter:	ADELIA-70 C18431_ADELIA-ADAPTER-B
		Ledil adapter:	ADELIA-75 C18431_ADELIA-ADAPTER-B
		Ledil adapter:	AMY-70-xx-B50
		Ledil adapter:	ANGELA-xx-B (B50)
		Ledil adapter:	ANGELETTE-xx-B
		Ledil adapter:	ANGELINA-xx-B (B50)
		Ledil adapter:	CARMEN-xx-B (70) (B50)
		Ledil adapter:	YASMEEN-70-xx-B50
		Ledil adapter:	ZORYA-SC-B (B50)

638a

COB served by Holder	Optic served by Holder	
	Zhaga adapter:	B50/35
	no optic interface adapter:	35mm fixing distance