



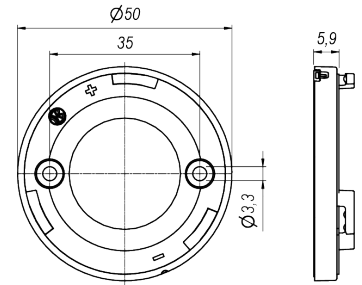


B+W ID **47947**  
Hybrid Holder 663a  
3Hook

rated current 5A  
rated voltage 250V  
rated temp. T120

B+W interface 3Hook



VDE certificate	<a href="#">40050075</a>		fixing	2 screws M3	Flyer	<a href="#">B+W_630_OnePager_EN</a>
UL certificate	<a href="#">E472943Sec2</a>		max. torque	0,5 Nm	Tec.Guide	<a href="#">B+W_630_Technical Guide</a>
CE certificate	<a href="#">630CE</a>					
material						
housing	PBT / Mica					
contact	CuSn					

COB served by Holder		Optic served by Holder	
<b>Nichia</b>	NFCWJ108B-Vx	<b>Carclo</b> adapter:	S1
<b>Nichia</b>	NFDWJ130B-Vx	<b>Ledil</b> adapter:	ANGELA (3Hook)
<b>Nichia</b>	NVEWJ048Z-Vx	<b>Ledil</b> adapter:	ANGELETTE (3Hook)
		<b>Ledil</b> adapter:	ANGELINA (3Hook)
		<b>Ledil</b> adapter:	MOLLY (3Hook)
		<b>Ledil</b> adapter:	RONDA (3Hook)